

21423 Winsen (Luhe) - Germany


Telefon: +49 (0)4171 / 8480-0 Homepage: www.ampri.de e-mail: info@ampri.de

Technical Data Sheet

Article-No.: **081312**

Description: SOLID SAFETY High Grip Black

Nitrile examination glove black, non sterile, powder free





PRODUCT DESCRIP	TION						
material	☐ Latex	☑ Nitrile	□ Vinyl	☐ Vinyl-Nitrile- mixture	Polyethy-lene (PE)	☐ TPE	□ cotton
colour	white	☐ blue	☑ black	☐ mint	☐ purple	mix	□ bordeaux
characteristics	☐ prepowdered	powderfree	sterile	non sterile	☑ ambidex-	fits hand-	☐ Aloe Vera
					trous	specific	inner coating
surface	textured	not textured	□ embossed				
SIZES							
	XS (5-6)	S (6-7)	M (7-8)	L (8-9)	XL (9-10)	XXL (10-11)	XXXL (11-12)
width	-	80 ± 10 mm	95 ± 10 mm	110 ± 10 mm	115 ± 10 mm	125 ± 10 mm	-
length	-	≥ 240 mm	≥ 240 mm	≥ 240 mm	≥ 240 mm	≥ 240 mm	-
REGULATORY AFFA	AIRS						
PPE-Regulation (EU) 2016/425	☐ Category I	☐ Category II	☑ Category III	☐ no PPE-article			
MD-Regulation	☑ Class I	Class II a	☐ Class III	☐ sterile	☐ measuring	no medical	CE
(EU) 2017/745					function	device	
Food Contact	☑ acidic foods	☑ aqueous	✓ fatty foods	☑ alcoholic	☑ dry foods	☐ not approved	
(EG) 1935/2004		foods		foods		for food-	77
						contact	
STANDARDISATION			1	1			
EN 388 Mechanical	abrasion	blade cut	tear resistance	nuncturo	blade cut	impact test	
Risks	resistance	resistance	tear resistance	puncture 		impact test	
	resistance			resistance	resistance TDM-Test		
Level	not applicable	Coupe-Test		resistance	TDM-Test		
		Coupe-Test	mical	resistance		letter	
Level		Coupe-Test	mical	resistance	TDM-Test		ISO 374-1/Type B
Level EN 374-1	not applicable	Coupe-Test cher	mical	resistance	TDM-Test	(ISO 374-1/Type B
Level EN 374-1 Chemical Risks	not applicable Sodium hydroxide	Coupe-Test chel	mical	resistance	TDM-Test	(ISO 374-1/Type B
Level EN 374-1 Chemical Risks EN 374-4	not applicable Sodium hydroxide Hydrogen Peroxide	Coupe-Test chel	mical	resistance	TDM-Test code	(ISO 374-1/Type B
Level EN 374-1 Chemical Risks	not applicable Sodium hydroxide Hydrogen Peroxide	Coupe-Test chel	mical	resistance	TDM-Test code	(
Level EN 374-1 Chemical Risks EN 374-4 Degradation	not applicable Sodium hydroxide Hydrogen Peroxide Formaldehyde 37%	cher			Code		ISO 374-1/Type B
Level EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5	not applicable Sodium hydroxide Hydrogen Peroxide Formaldehyde 37%	cher			TDM-Test code		KPT 8N NO 374-5:2016
Level EN 374-1 Chemical Risks EN 374-4 Degradation	not applicable Sodium hydroxide Hydrogen Peroxide Formaldehyde 37%	cher			Code		
Level EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness	not applicable Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	cher 40% 2 30% 6	sms (viral, bacteria a	and fungi). Test acco	Code		KPT 8N 150 274-5:2016
Level EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420	not applicable Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	cher	sms (viral, bacteria a	and fungi). Test acco	Code		KPT 8N 150 274-5:2016
Level EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves	not applicable Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	cher 40% 2 30% 6 gainst microorganis	oms (viral, bacteria a	and fungi). Test acco	rding to ISO 16604 -	method B.	KPT 8N 150 274-5:2016
Level EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420	not applicable Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	cher 40% 2 30% 6 gainst microorganis	oms (viral, bacteria a	and fungi). Test acco	Code	method B.	KPT EN ISO 374-5-2016 VIRUS
Level EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves	not applicable Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	cher 40% 2 30% 6 gainst microorganis	oms (viral, bacteria a	and fungi). Test acco	rding to ISO 16604 -	method B.	KPT EN ISO 374-5:2016 VIRUS
Level EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455	not applicable Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a	cher 40% 2 30% 6 gainst microorganis	oms (viral, bacteria a	and fungi). Test acco	rding to ISO 16604 -	method B.	KPT EN ISO 374-5-2016 VIRUS
Level EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for	not applicable Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th	cher 40% 2 30% 6 gainst microorganis ne requirements accome requirements accome	oms (viral, bacteria according to EN ISO 21	and fungi). Test acco	rding to ISO 16604 -	method B. break ≥ 3.6 N.	KPT EN 150 274-5-2016 VIRUS
Level EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use	not applicable Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th	cher 40% 2 30% 6 gainst microorganis ne requirements accome requirements accome	oms (viral, bacteria according to EN ISO 21	and fungi). Test acco	rding to ISO 16604 -	method B. break ≥ 3.6 N.	KPT EN 150 324-52016 WIRUS EN 455
Level EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use EN 455-1	not applicable Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th The glove meets th	cher 40% 2 30% 6 gainst microorganis ne requirements accome requirements accome	oms (viral, bacteria according to EN ISO 21	and fungi). Test acco	rding to ISO 16604 -	method B. break ≥ 3.6 N.	KPT EN ISO 324-52016 VIRUS EN 455
Level EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use EN 455-1 freedom from holes	not applicable Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th The glove meets th The glove has an A general Inspection	cher 40% 2 30% 6 gainst microorganis ne requirements accome requirements accome	oms (viral, bacteria according to EN ISO 21	and fungi). Test acco	rding to ISO 16604 -	method B. break ≥ 3.6 N.	KPT EN ISO 324-52016 VIRUS EN 455
Level EN 374-1 Chemical Risks EN 374-4 Degradation EN 374-5 microorganism tightness EN ISO 21420 protective gloves EN 455 medical gloves for single use EN 455-1 freedom from holes EN 16350	not applicable Sodium hydroxide Hydrogen Peroxide Formaldehyde 37% The glove is tight a The glove meets th The glove meets th The glove has an A general Inspection	cher 40% 2 30% 6 gainst microorganis ne requirements accome requirements accome	oms (viral, bacteria according to EN ISO 21	and fungi). Test acco	rding to ISO 16604 -	method B. break ≥ 3.6 N.	KPT EN ISO 324-52016 VIRUS EN 455

QMFORM_60.003 issue date: 16.04.2025

EN



21423 Winsen (Luhe) - Germany Telefon: +49 (0)4171 / 8480-0


Homepage: www.ampri.de e-mail: info@ampri.de

Technical Data Sheet

Article-No.: **081312**

Description: SOLID SAFETY High Grip Black

Nitrile examination glove black, non sterile, powder free

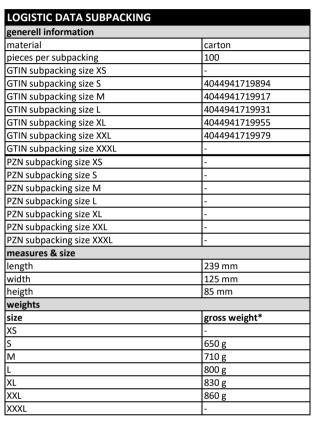

LOGISTIC DATA PALETTE	
general information	
kind of palett	euro-palette
measures & size	
cartons per layer	6
layers per palette	7
heigth of the palette	190 cm
weights	
size	gross weight*
XS	-
S	319 kg
M	344 kg
L	382 kg
XL	395 kg
XXL	407 kg
XXXL	-

EN



generell information				
material	carton			
subpackings per outer packing	10			
GTIN outer packing size XS	-			
GTIN outer packing size S	4044941719900			
GTIN outer packing size M	4044941719924			
GTIN outer packing size L	4044941719948			
GTIN outer packing size XL	4044941719962			
GTIN outer packing size XXL	4044941719986			
GTIN outer packing size XXXL	-			
PZN outer packing size XS	-			
PZN outer packing size S	-			
PZN outer packing size M	-			
PZN outer packing size L	-			
PZN outer packing size XL	-			
PZN outer packing size XXL	-			
PZN outer packing size XXXL	-			
measures & size				
length	440 mm			
width	260 mm			
heigth	250 mm			
weights				
size	gross weight*			
XS	-			
S	7.000 g			
M	7.600 g			
L	8.500 g			
XL	8.800 g			
XXL	9.100 g			
XXXL	-			



AMPri Handelsgesellschaft mbH

Benzstraße 16

21423 Winsen (Luhe) - Germany Telefon: +49 (0)4171 / 8480-0

Homepage: www.ampri.de e-mail: info@ampri.de

Technical Data Sheet

Article-No.: **081312**

Description: SOLID SAFETY High Grip Black

Nitrile examination glove black, non sterile, powder free



WARNINGS AND SAFETY INFORMATION

storage / expiry date

Store gloves in original packaging in a cool and dry place without additional weight, protect from direct sunlight. Do not store near ozone sources (laser printers, copiers). The actual expiry time in use cannot be specified in general terms, as it depends on the general conditions of use. An individual risk assessment must be carried out in each case. The expiry date - valid for proper storage - is stated on the packaging.

use and control

Always use protective gloves only for the intended use and in the correct size. A check/risk assessment must be carried out to ensure that the gloves are suitable for the intended use, as the conditions at the workplace may deviate from those of the type test depending on temperature, abrasion and degradation. Breakthrough times and permeation levels are based on laboratory measurements and are determined using samples taken from the palm of the hand. The actual duration of protection of a glove with a specific substance can vary significantly due to the conditions of use (temperature, abrasion, stretching). In the case of aggressive chemicals, degradation (change in mechanical properties) can be an important factor to consider when selecting chemical-resistant gloves. This information does not reflect the actual duration of protection in the workplace and the distinction between mixtures and pure chemicals. The chemical resistance was determined under laboratory conditions only on the basis of samples from the palm and refers only to the chemicals tested. The situation may be different if the chemical is used in a mixture. The penetration resistance was evaluated under laboratory conditions and refers only to the tested specimen. The degradation results according to EN ISO 374-4 show the change in puncture resistance of the gloves after exposure to the tested chemical.

Before use, the gloves must be checked for holes or damage.

disposal

Used gloves must be disposed of after contact with chemicals in accordance with the disposal regulations for the chemical and the regulations of the local waste disposal company. Unused gloves can be disposed of with household waste.

disinfection

Disinfection is not intended for these gloves and is the responsibility of the user.

warnings/ allergy information Protective gloves are intended for single use only.

This product contains dithiocarbamates, which may cause allergic reactions

donning and doffing instructions











*slight deviations possible due to standard tolerances

rev-no.: 2025-01 date 16.06.2025

changes and errors excepted

QMFORM_60.003 issue date: 16.04.2025